


# LARES

The LARES LSB-D10 is a high-output subwoofer system designed to provide high fidelity, low frequency audio reproduction from a relatively small enclosure. The LSB-D10 provides exceptionally linear low frequency extension that integrates seamlessly with LARES full range loudspeakers. This is particularly important for systems that utilize a pipe organ, or when a venue lacks sufficient low frequency information. The LSB-D10 is provided with a flat black painted finish and a black coated steel grille.

## LARES LSB-D10 SUBWOOFER

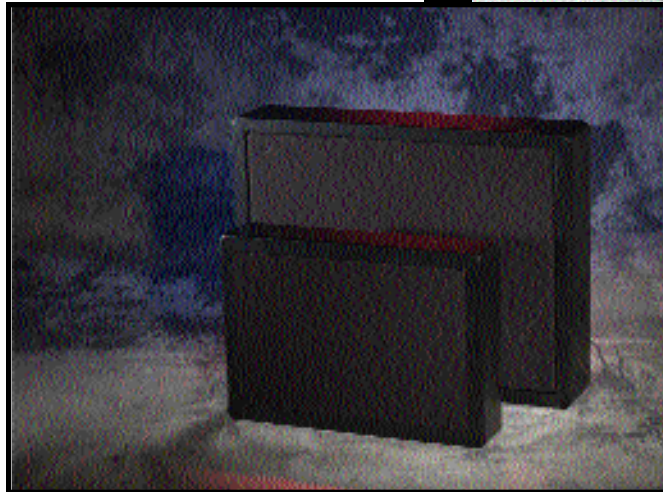

### SPECIFICATIONS

**System Type:**  
INFRA Sealed chamber  
(1.4 cu. ft.)

**Frequency Response:**  
8 Hz to 95 Hz +/-3 dB  
(2 pi Steradians, with  
8Hz Integrator)

**Sensitivity:**  
92 dB SPL @ 80 Hz (1W @ 1m)

**Impedance:**  
4 Ohms

**Power Handling:**  
400 W continuous sine wave  
400 W instantaneous peak

**Input Connectors:**  
Cinch 142 screw terminal  
barrier strip

**Low Frequency Transducers:**  
2 - 10" INFRA cone  
2.5" Voice coil  
60 oz. Magnet

**Grille:**  
16 Gauge black vinyl coated perforated steel

**Optional Hardware:**  
Rigging points

**Enclosure:**  
18 mm 13-ply birch plywood

**Finish:**  
Black paint

**Dimensions:**  
13"h x 22"w x 13"d (33 cm x 56 cm x 33 cm)

**Weight:**  
44 lbs (20 kg)

**Shipping Dimensions:**  
27" x 16" x 16" (69 cm x 41 cm x 41 cm)

**Shipping Weight:**  
51 lbs. (24 kg)

LARES Associates  
30 Dunbarton Road • Belmont, MA 02478  
Tel (617) 484-9266  
Fax (617) 484-8620  
[www.lares-lexicon.com](http://www.lares-lexicon.com)